


***QES1515 - Series
 Modularized 15" Panel PC with Pentium 4 Solution
 Intel Chip Set***

Features and Benefits:

- *Intel 845GV + ICH4 Chipset*
- *High precision touchscreen*
- *Aluminum IP65 compliant front bezel*
- *Built-in digital I/O (8 x input / 8 x output)*
- *High speed Gigabit LAN*
- *CompactFlash / Disk On Module support*
- *3 expansion slots (1 x PCI or 1 x ISA / 3 x PCI or 3 x ISA optional)*
- *Optional slim FDD / slim CD-ROM drive*
- *High Performance for multimedia solution*
- *Modularized panel and main case*
- *Switchable 15 or 17" panel*
- *Industry level of durability*
- *Spill proof water-resistance durability IP65 / NEMA4*
- *2005 Taiwan Symbol of Excellent winner*



Highlights:

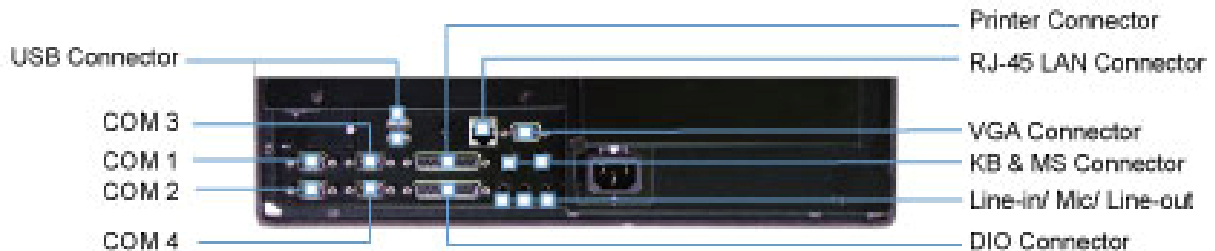

QES1515 - Series Specifications

Systems:

<i>CPU Type</i>	Intel Pentium 4 / Pentium 4-M / Prescott / Celeron 2.8GHz
<i>Memory Support</i>	1 x DIMM, DDR333 memory up to 1GB max
<i>Front Bezel</i>	Aluminum
<i>IP65 / NEMA4</i>	Yes
<i>Power Supply</i>	AC 200W Power Supply
<i>O.S. Support</i>	Win 98SE / 2000 / XP, Linux Redhat 8.0/9.0
<i>Dimension (W x H x D)</i>	400mm x 300mm x 104mm (15.6" x 11.7" x 4.09")
<i>System Weight</i>	9.5 Kg (21.38lb)
<i>VESA Mounting Support</i>	75mm / 100mm VESA bracket optional
<i>Certificate</i>	FCC / CE / LVD / UL

I/O Ports:

<i>USB</i>	2 x USB 2.0
<i>Keyboard / Mouse</i>	2 x PS/2 port
<i>Audio</i>	Line in / Line out / MIC in (Realtek ALC202)
<i>Parallel</i>	1 x parallel port (SPP / EPP / ECP)
<i>Serial Port</i>	4 x COMs, COM1 supports +5V or +12V, COM2 for RS232/422/485
<i>Digital I/O</i>	8 Digital Inputs / 8 Digital Outputs
<i>LAN</i>	1 x 10/100/1000 Mbps (Intel 82541)
<i>VGA</i>	1
<i>Brightness Control</i>	VR on rear panel
<i>Drive Bay</i>	1 x 3.5" PATA HDD, 1 x Slim CD, 1 x slim FDD, 1 x DOC (build-in riser card)
<i>Expansion Slots</i>	1 x PCI or 1 x ISA / 3 x PCI or 3 x ISA (optional)

Display

<i>LCD</i>	AUO 15" XGA TFT LCD (1024 x 768)
<i>Touch Screen</i>	7W Analog resistive (USB interface)

Environment

<i>Operation Temperature</i>	0°~40°C (32°~104°F)
<i>Storage Temperature</i>	-20°~60°C (-4°~140°F)
<i>Humidity</i>	20~90%

Options

<i>Operating System</i>	Windows XP Pro (installed w/license)
<i>DVD-RW Upgrade</i>	Upgrade to DVD-RW from CD-ROM
<i>Memory Upgrades</i>	Upgrade to 512MB DDR or Upgrade to 1GB DDR
<i>Hard Drive Upgrades</i>	Upgrade to 160GB
<i>Riser Cards</i>	1 x PCI + 1 x ISA Riser Card or 3 x PCI + 3 x ISA Riser Card
<i>CF Module</i>	Compact Flash Module
<i>Mounting Option</i>	VESA Bracket